


|< 830 mm >|



with overflow, with tap platform, bowl on left side, 830 mm		Weight	Order number
with overflow, with tap pratform, bowt on telt side, 830 mm			
Colors			
00 White Alpin 32 White Satin Matt			
Variant			
•	830 x 490 mm	21.300 kilogram	23458300
•	830 x 490 mm	21.300 kilogram	23458300
×	830 x 490 mm	21.300 kilogram	23458360
×	830 x 490 mm	21.300 kilogram	23458360
time to come. When ordering WonderGliss please add a "1" as eleventh digit t	o the model number.		
When ordering WonderGliss please add a "1" as eleventh digit t	o the model number.		
	o the model number. 1 1/4" mm	0.400 kilogram	005076
When ordering WonderGliss please add a "1" as eleventh digit to Accessory		0.400 kilogram	
When ordering WonderGliss please add a "1" as eleventh digit to Accessory Space saving siphon		0.400 kilogram	
When ordering WonderGliss please add a "1" as eleventh digit to Accessory Space saving siphon Suitable products Vanity unit wall-mounted 1 pull-out compartment, for ME by	1 1/4" mm	0.400 kilogram	005076

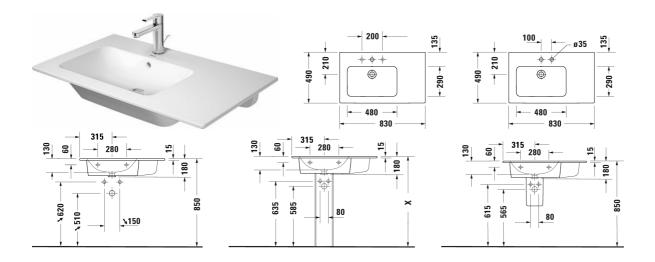

|< 830 mm >|

Vanity unit wall-mounted 1 pull-out compartment, Shelf element laterally, for ME by Starck # 234583 bowl on left side, 820 x 481 mm	820 x 481 mm	LC6191
Vanity unit wall-mounted 1 pull-out compartment, Shelf element laterally, for ME by Starck # 234583 bowl on left side, 820 x 479 mm	820 x 479 mm	BR4012
Vanity unit wall-mounted 1 pull-out compartment, for ME by Starck # 233683, 234583, 234683, 810 x 478 mm	810 x 478 mm	XS4072
Vanity unit wall-mounted 2 drawers, upper drawer including cut-out for siphon and siphon cover, for ME by Starck # 234583 bowl on left side, 810 x 478 mm	810 x 478 mm	XS4176
Vanity unit floor-standing 2 pull-out compartments, upper pull-out compartment including cut-out for siphon and siphon cover, integrated base frame legs with height adjustement, for ME by Starck # 234583 bowl on left side, 810 x 478 mm	810 x 478 mm	XS4450
Vanity unit wall-mounted 1 pull-out compartment, for ME by Starck # 233683, 234583, 234683, 810 x 480 mm	810 x 480 mm	XV4026
Vanity unit wall-mounted 2 drawers, upper drawer including cut-out for siphon and siphon cover, for ME by Starck $\#$ 234583 bowl on left side, 810 x 480 mm	810 x 480 mm	XV4158
Vanity unit floor-standing 2 pull-out compartments, upper pull- out compartment including cut-out for siphon and siphon cover, for ME by Starck # 234583 bowl on left side, 810 x 480 mm	810 x 480 mm	XV4486
Vanity unit wall-mounted 1 pull-out compartment, for ME by Starck # 233683, 234583, 234683, 810 x 462 mm	810 x 462 mm	DE4262
Vanity unit wall-mounted 1 drawer, 1 pull-out compartment, upper drawer including cut-out for siphon and siphon cover, for ME by Starck # 234583 bowl on left side, 810 x 462 mm	810 x 462 mm	DE4366
Vanity unit wall-mounted 1 pull-out compartment, for ME by Starck # 233683, 234583, 234683, 810 x 480 mm	810 x 480 mm	K25063
Vanity unit wall-mounted 2 drawers, upper drawer including cut-out for siphon and siphon cover, for ME by Starck # 234583 bowl on left side, 810 x 480 mm	810 x 480 mm	K25267
Recommended faucets		
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,		B11020001
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,		B21020001
Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,		B11020002



|< 830 mm >|

Single lever basin mixer M ceramic cartridge, Projection 139 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	B21020002
Single lever basin mixer M ceramic cartridge, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	DE1020001
Single lever basin mixer M ceramic cartridge, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	DE1020002
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	DE1021001
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, Projection 109 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, chrome, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	DE1021002
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, projection 135 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	TU1021001
Single lever basin mixer M FreshStart ceramic cartridge, in centre position cold water, projection 135 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	TU1021002
Single lever basin mixer M ceramic cartridge, projection 135 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,	TU1020002
Single lever basin mixer M ceramic cartridge, projection 135 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,	TU1020001
Single lever basin mixer M ceramic cartridge, projection 122 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, with pop-up waste set,	WA1020001
Single lever basin mixer M ceramic cartridge, projection 122 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, recommended operating pressure 1 - 5 bar, without pop-up waste set,	WA1020002



|< 830 mm >|

Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), connection type: basic set for concealed installation, includes: visible parts, recommended operating pressure 1 - 5 bar, projection 202 mm,	WA1070004
Single lever basin mixer M ceramic cartridge, projection 129 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, recommended operating pressure 1 - 5 bar, with pop-up waste set,	MH1020001
Single lever basin mixer M ceramic cartridge, projection 129 mm, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), normal spray, recommended operating pressure 1 - 5 bar, without pop-up waste set,	MH1020002
Single lever basin mixer for concealed installation normal spray, ceramic cartridge, aerator with Easy-clean sprayplate, flow rate 5,0 l/min (3 bar), connection type: basic set for concealed installation, recommended operating pressure 1 - 5 bar,	MH1070004
Single lever basin mixer M FreshStart connection size DN15,	WA1021001
Single lever basin mixer M FreshStart connection size DN15,	WA1021002
Single lever basin mixer M MinusFlow connection size DN15,	WA1022001
Single lever basin mixer M MinusFlow connection size DN15,	WA1022002

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.